

# Ralston Factsheet


Transparant about sustainability



| AQUA                            | CO <sup>2</sup> emissions* | Biobased raw materials | Durable protection** | VOC category and content | Interior / Exterior |
|---------------------------------|----------------------------|------------------------|----------------------|--------------------------|---------------------|
| Ralston Aqua All Primer         | 2,47 kg / litre            |                        | primer               | A/d 130 g / litre        |                     |
| Ralston Aqua High-Gloss         | 2,97 kg / litre            |                        | 5 years              | A/d 130 g / litre        |                     |
| Ralston Aqua Satin              | 2,53 kg / litre            |                        | 6 years              | A/d 130 g / litre        |                     |
| Ralston Aqua Semi-Matt          | 2,46 kg / litre            |                        | 6 years              | A/d 130 g / litre        |                     |
| Ralston Aqua Matt               | 2,67 kg / litre            |                        | interior             | A/d 130 g / litre        |                     |
| Ralston Aqua 3-in-1 Satin       | 2,50 kg / litre            |                        | 6 - 8 years          | A/d 130 g / litre        |                     |
| Ralston Aqua 2-in-1 Spray Satin | 2,42 kg / litre            |                        | interior             | A/d 130 g / litre        |                     |

| RED LABEL                     | CO <sup>2</sup> emissions* | Biobased raw materials | Durable protection** | VOC category and content | Interior / Exterior |
|-------------------------------|----------------------------|------------------------|----------------------|--------------------------|---------------------|
| Ralston 4S Wood-Primer        | 3,53 kg / litre            |                        | primer               | A/d 300 g / litre        |                     |
| Ralston Uni-Primer            | 3,48 kg / litre            |                        | primer               | A/i 500 g / litre        |                     |
| Ralston 4S High-Gloss         | 4,25 kg / litre            |                        | 6 - 8 years          | A/d 300 g / litre        |                     |
| Ralston 4S Satin              | 3,92 kg / litre            |                        | 5 years              | A/d 300 g / litre        |                     |
| Ralston Satin                 | 3,60 kg / litre            |                        | 5 - 6 years          | A/d 300 g / litre        |                     |
| Ralston Semi-Matt             | 3,57 kg / litre            |                        | 5 - 6 years          | A/d 300 g / litre        |                     |
| Ralston Matt                  | 3,45 kg / litre            |                        | 5 - 6 years          | A/d 300 g / litre        |                     |
| Ralston Industrial High-Gloss | 4,25 kg / litre            |                        | 5 - 6 years          | A/i 500 g / litre        |                     |
| Ralston Industrial Satin      | 3,52 kg / litre            |                        | 5 - 6 years          | A/i 500 g / litre        |                     |
| Ralston UniCoat 3-in-1        | 3,61 kg / litre            |                        | 5 - 6 years          | A/i 500 g / litre        |                     |
| Ralston 3-in-1 Satin          | 3,44 kg / litre            |                        | 4 - 5 years          | A/d 300 g / litre        |                     |

| WALL PAINTS                 | CO <sup>2</sup> emissions* | Biobased raw materials | Durable protection**                 | VOC category and content | Interior / Exterior |
|-----------------------------|----------------------------|------------------------|--------------------------------------|--------------------------|---------------------|
| Ralston Wall Primer         | 1,17 kg / litre            |                        | primer                               | A/h 30 g / litre         |                     |
| Ralston Siloxan Primer      | 1,03 kg / litre            |                        | primer                               | A/h 30 g / litre         |                     |
| Ralston Colourprime         | 1,76 kg / litre            |                        | primer                               | A/h 30 g / litre         |                     |
| Ralston IsoWall Primer      | 1,69 kg / litre            |                        | primer                               | A/a 30 g / litre         |                     |
| Ralston ExtraTex Satin [20] | new                        |                        | scrub resistance class 1             | A/a 30 g / litre         |                     |
| Ralston ExtraTex Matt [2]   | 2,09 kg / litre            |                        | scrub resistance class 1             | A/a 30 g / litre         |                     |
| Ralston SuperTex Matt [5]   | 1,59 kg / litre            |                        | scrub resistance class 2             | A/a 30 g / litre         |                     |
| Ralston Tex Matt            | 1,56 kg / litre            |                        | scrub resistance class 3             | A/a 30 g / litre         |                     |
| Ralston ProjecTex           | 1,95 kg / litre            |                        | scrub resistance class 2             | A/a 30 g / litre         |                     |
| Ralston Pro Matt [3]        | 2,50 kg / litre            |                        | scrub resistance class 1             | A/a 30 g / litre         |                     |
| Ralston ProClean [7]        | 2,50 kg / litre            |                        | scrub resistance class 1             | A/a 30 g / litre         |                     |
| Ralston Uniplex Extra       | 2,47 kg / litre            |                        | 4 - 6 years scrub resistance class 1 | A/a 30 g / litre         |                     |
| Ralston Siloxan Matt        | 2,42 kg / litre            |                        | 5 - 7 years scrub resistance class 1 | A/a 30 g / litre         |                     |
| Ralston PlastDecor          | 2,21 kg / litre            |                        | scrub resistance class 1             | A/a 30 g / litre         |                     |

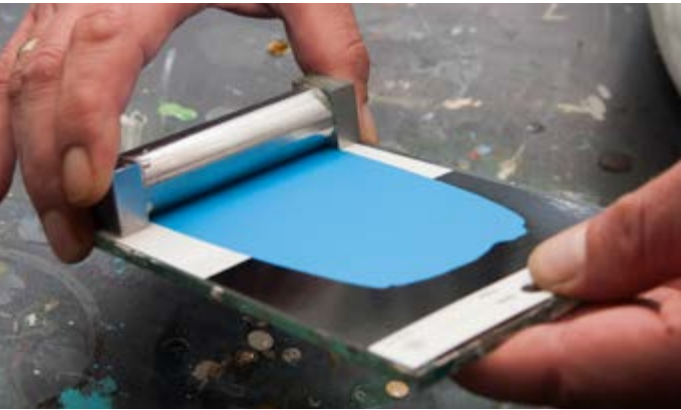

- \* This is the total CO<sup>2</sup> emissions released during the life cycle of the product, including packaging, until the moment the product leaves our warehouse. The CO<sup>2</sup> emissions are expressed in CO<sup>2</sup> equivalents.
- \*\* Durability depends on the location/situation, the surface to be treated, the construction, the paint system to be used and the colour, the glazing system, the mechanical load, the condition of the interior painting on the outer wall element, etc. The scrub resistance class is determined in accordance with DIN EN 13 300 and after 28 days of drying.



Part of Royal Van Wijk Verf

**Ralston**  
COLOUR & COATINGS